


JEFFERSON CONCRETE CORP.

22850 MURROCK CIRCLE
WATERTOWN, NY 13601
TEL (315)788-4171 FAX (315)788-7958
www.jeffersonconcrete.com

24" X 24" I.D.
CATCH BASIN
W/ KNOCKOUTS

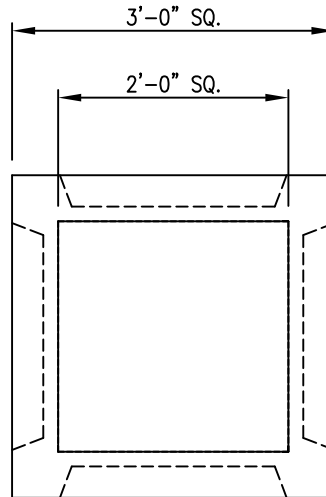


FRAME AND GRATE
AS SPECIFIED



KNOCKOUTS AVAILABLE AS FOLLOWS:

- 2'x2'x2'-20"x20"
- 2'x2'x3'-32"x20"
- 2'x2'x4'-44"x20"

INV. OPENINGS AND SIZE
AS PER PLANS

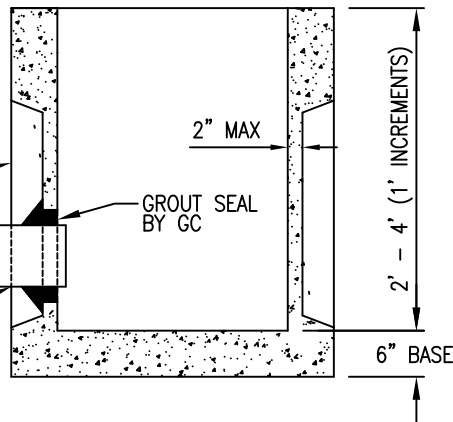

Section

GENERAL NOTES:

CONCRETE TO BE MIN. 5000 PSI @ 28 DAYS

AIR ENTRAINED 5%-8%

REINFORCED PER N.Y.S.D.O.T. STANDARDS SHEETS 604-5 TO 604-8 (HS-20 LOADING)

REINFORCEMENT ASTM A615

UPDATED 04/08/10